

BAE SECURA PVS SOLAR

Technical Specification for Vented Lead-Acid Batteries (VLA)

1. Application

BAE SECURA PVS SOLAR batteries are the optimal solution for a reliable and robust storage of regenerative energy under extreme conditions in the industrial sector.

The special electrode design with tubular electrodes distinguishes the BAE SECURA PVS SOLAR batteries leading to high security and reliability as well as high cycle life time.



Similar to the illustration

2. Technical data (Reference temperature 20 °C)

Type	C_{1h} Ah	C_{10h} Ah	C_{20h} Ah	C_{72h} Ah	C_{100h} Ah	C_{120h} Ah	C_{240h} Ah	R_i 1) mΩ	I_k 2) kA	Length (L) mm	Width (W) mm	Height (H) mm	Weight dry kg	Weight filled kg
U_e V/cell	1.67	1.80	1.80	1.80	1.80	1.80	1.80							
2 PVS 140	63	111	127	141	143	144	148	1.52	1.37	105	208	420	9.1	14.5
3 PVS 210	95	167	191	211	215	217	222	1.06	1.96	105	208	420	11.2	16.4
4 PVS 280	127	223	254	282	287	289	295	0.84	2.46	105	208	420	12.8	18.0
5 PVS 350	159	279	318	352	359	361	369	0.70	2.98	126	208	420	15.3	21.7
6 PVS 420	191	334	382	424	431	434	444	0.60	3.47	147	208	420	18.1	25.7
5 PVS 550	223	389	432	486	496	500	513	0.57	3.61	126	208	535	20.0	28.8
6 PVS 660	267	467	518	583	595	601	616	0.49	4.18	147	208	535	23.5	34.0
7 PVS 770	310	544	604	681	694	700	720	0.44	4.69	168	208	535	26.8	39.1
6 PVS 900	352	665	748	856	877	888	916	0.47	4.41	147	208	710	33.0	47.4
7 PVS 1050	415	777	872	993	1,020	1,033	1,065	0.36	5.66	215	193	710	42.1	61.5
8 PVS 1200	473	886	996	1,137	1,160	1,178	1,216	0.32	6.36	215	193	710	46.6	65.4
9 PVS 1350	522	992	1,116	1,274	1,300	1,320	1,365	0.33	6.20	215	235	710	51.4	75.4
10 PVS 1500	585	1,100	1,240	1,418	1,450	1,464	1,516	0.28	7.25	215	235	710	56.0	79.4
11 PVS 1650	635	1,210	1,362	1,555	1,590	1,608	1,665	0.28	7.36	215	277	710	61.0	89.6
12 PVS 1800	698	1,320	1,486	1,699	1,740	1,752	1,816	0.24	8.41	215	277	710	65.4	93.4
11 PVS 2090	790	1,470	1,636	1,836	1,870	1,884	1,941	0.24	8.38	215	277	855	72.7	105.9
12 PVS 2280	869	1,600	1,784	2,001	2,040	2,052	2,116	0.22	9.48	215	277	855	77.4	110.4
13 PVS 2470	978	1,740	1,938	2,174	2,210	2,232	2,292	0.16	13.03	215	400	815	90.8	137.8
14 PVS 2660	1,051	1,880	2,080	2,332	2,380	2,400	2,448	0.15	13.82	215	400	815	95.3	142.4
15 PVS 2850	1,123	2,010	2,220	2,498	2,550	2,568	2,640	0.14	14.43	215	400	815	100.2	146.9
16 PVS 3040	1,195	2,140	2,380	2,664	2,710	2,736	2,808	0.13	15.20	215	400	815	105.4	151.6
17 PVS 3230	1,280	2,290	2,540	2,858	2,910	2,940	3,000	0.12	16.91	215	490	815	117.7	175.1
18 PVS 3420	1,352	2,420	2,680	3,024	3,080	3,108	3,192	0.11	17.55	215	490	815	121.9	179.1
19 PVS 3610	1,425	2,560	2,840	3,189	3,250	3,276	3,360	0.11	18.36	215	490	815	126.8	183.6
20 PVS 3800	1,496	2,690	2,980	3,355	3,420	3,444	3,528	0.11	18.92	215	490	815	132.0	188.3
22 PVS 4180	1,635	2,950	3,280	3,686	3,750	3,780	3,888	0.10	19.92	215	580	815	145.4	213.9
24 PVS 4560	1,777	3,220	3,560	4,010	4,090	4,128	4,224	0.09	21.26	215	580	815	155.2	223.0
26 PVS 4940	1,917	3,480	3,860	4,341	4,420	4,464	4,584	0.09	22.49	215	580	815	165.0	232.0


1, 2) Internal resistance R_i and short circuit current I_k according to IEC 60896-11

Height (H) is the maximum height between container bottom and top of the bolts in assembled condition.


BAE SECURA PVS SOLAR batteries are also available as dry pre-charged version. They are titled with additional "TG", e.g. 4 PVS 280 TG.

All values published in the table correspond to 100 % discharge of current depending capacity without voltage drop of connectors. Please consider item 7.


3. Terminal positions




2 PVS 140 to 6 PVS 900



7 PVS 1050 to 12 PVS 2280



13 PVS 2470 to 16 PVS 3040



17 PVS 3230 to 26 PVS 4940

Terminals are designed as female poles with brass inlay M10 for flexible insulated copper cables with cross-section 25, 35, 50, 70, 95 or 120 mm² or insulated solid copper connectors with cross-section 90, 150 or 300 mm².

Technical Specification for BAE SECURA PVS SOLAR



4. Design

Positive electrode	Tubular-plate with a woven polyester gauntlet and solid grids in a corrosion-resistant PbSbSnSe-low antimony alloy
Negative electrode	Grid-plate in a low antimony alloy with long-life expander material
Separation	Microporous separator
Electrolyte	Sulphuric acid with a density of 1.24 kg/l at 20 °C (68 °F)
Container	High impact, transparent SAN (Styrene acrylonitrile), UL-94 rating: HB
Lid	High impact SAN in dark grey colour (colour may vary slightly from given image), UL-94 rating: HB
Plugs	on request also in ABS (Acrylonitrile butadiene styrene), UL-94 rating: V-0 Labyrinth plugs for arresting aerosols, BAE ceramic funnel plugs according to DIN 40740 or BAE ceramic plugs are recommended
Pole-bushing	100 % gas- and electrolyte-tight, sliding, plastic-coated "Panzerpol"
Kind of protection	IP 25 regarding EN 60529, touch protected according to BGV A3

5. Installation

BAE SECURA PVS SOLAR batteries are designed for indoor applications. For outdoor applications please contact BAE.


6. Maintenance

Every 6 months	Check battery voltage, pilot cell voltages, temperatures
Every 12 months	Check connections, record battery voltage, cell voltages and temperatures
Every 3 years	Average water-refilling interval (depending on utilization and ambient temperature)

7. Operational data

Depth of discharge (DOD)	Max. 80 % ($U_e = 1.91$ V/cell for discharge times >10 h; 1.74 V/cell for 1 h) deep discharges of more than 80 % DOD have to be avoided
Initial charge current (I or bulk phase)	Unlimited, the minimal charge current has to be 5 A/100 Ah C_{10}
Charge voltage at cyclic operation	Restricted from 2.30 V to 2.40 V per cell, operating instruction is to be observed
Float voltage/non cyclic voltage	2.23 V/cell
Adjustment of charge voltage	No adjustment necessary if battery temperature is kept between 10 °C and 30 °C (50 °F and 86 °F) in the monthly average, otherwise $\Delta U/\Delta T = -0.003$ V/cell per K
Recharge to 100 %	Within a period of 1 up to 4 weeks
Battery temperature	-20 °C to 55 °C (-4 °F to 131 °F), recommended temperature range 10 °C to 30 °C (50 °F to 86 °F)
Self-discharge	Approx. 3 % per month at 20 °C (68 °F)
IEC 61427 cycles	3,150 (A+B) at 40 °C (104 °F)
IEC 60896-11 cycles	>1,500 at 20 °C (68 °F)

8. Number of cycles as function of Depth of discharge

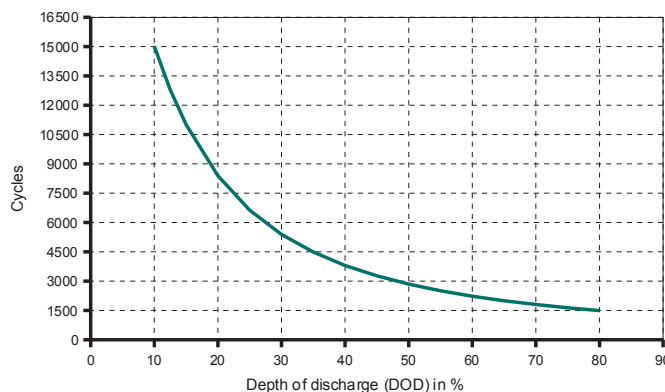

9. Transport

Batteries are not subject to ADR (road transport), if the conditions of Special Provision 598 (Chapter 3.3) are observed.

These cells/batteries are dangerous goods on sea transport. Declaration and packaging must comply with the requirements of IMDG-Codes.

10. Standards

Test standards	IEC 60896-11, IEC 61427
Safety standard, ventilation	IEC 62485-2

BAE Batterien GmbH
Wilhelminenhofstraße 69/70
12459 Berlin
Germany

Tel.: +49 (0)30 53001-661
Fax: +49 (0)30 53001-667
E-Mail: info@bae-berlin.de
www.bae-berlin.de

